


10ml Glass Syringe - Laboratory

with metal luer lock

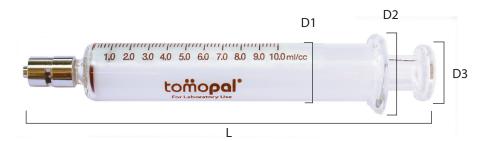

Tomopal Part # 130-4510

Piston Outside Diameter: 14.73 mm ± 0.15 mm

D1) Barrel Diameter Outside: 17.78 mm ± 0.35 mm

D2) Barrel Collar Diameter: 27.10 mm ± 0.75 mm

D3) Piston Collar Diameter: 17.80 mm ± 0.60 mm

L) Length: 128.80 mm ± 0.50 mm

Increment: 0.2 ml

Volume: 10.0 ml $\pm 1.5\%$ of volume

Features:

- The syringe is made from heat resistant borosilicate glass.
- · The material and construction is resistant to breakage from shock and sudden temperature changes.
- · It is annealed and tested until free of internal strain, to withstand repeated washing with hot water.
- Reinforced at luer lock tip and barrel base, the points at which most breakage occur.
- Plunger is individually ground and fitted to barrel for smooth movement with no back flow.
- Barrel rim is flat on both sides to prevent rolling and is wide enough for convenient finger tip grip.
- The syringes are available in custom fit design. The custom fit syringes are uniquely numbered for matching piston and barrel.
- The metal luer lock tip meets the specification of American National Standards for Medical Materials luer taper fitting performance, HIMA MD 70.1 - 1983.
- The metal luer lock fitting is made from nickel-plated brass and fits all female luer lock fittings.
- · The syringe is clearly marked with graduations of 0.2 ml and 1.0 ml. The graduations are permanently fused for lifetime legibility.

Glass Properties:

Expansion coefficient:52 +/- 10-7 / CentigradeDensity:2.33g +/- 0.03g CM³Modulus of elasticity:64 +/- 10³ mm⁻²Water resistance:First ClassAcid resistance:First ClassAlkali resistance:First Class

Softening point: 760 @ degrees centigrade

Melting temperature: 1250 @ degrees centigrade

Strain point: 500 @ degrees centigrade

Annealing point: 545 @ degrees centigrade

Tel: 916.429.7240

Fax: 916.429.2701

Hardness: 7
Color: Clear