


10ml Glass Syringe - Laboratory with metal luer lock

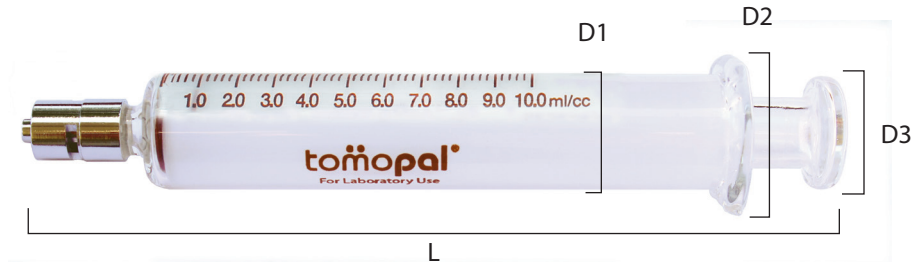

Tomopal Part # 130-4010

Piston Outside Diameter:	14.73 mm ± 0.15 mm
D1) Barrel Diameter Outside:	17.78 mm ± 0.35 mm
D2) Barrel Collar Diameter:	27.10 mm ± 0.75 mm
D3) Piston Collar Diameter:	17.80 mm ± 0.60 mm
L) Length:	128.80 mm ± 0.50 mm
Increment:	0.2 ml
Volume:	10.0 ml ±1.5% of volume

Features:

- The syringe is made from heat resistant borosilicate glass.
- The material and construction is resistant to breakage from shock and sudden temperature changes.
- It is annealed and tested until free of internal strain, to withstand repeated washing with hot water.
- Reinforced at luer lock tip and barrel base, the points at which most breakage occur.
- Plunger is individually ground and fitted to barrel for smooth movement with no back flow.
- Barrel rim is flat on both sides to prevent rolling and is wide enough for convenient finger tip grip.
- The syringes are available in custom fit design. The custom fit syringes are uniquely numbered for matching piston and barrel.
- The metal luer lock tip meets the specification of American National Standards for Medical Materials luer taper fitting performance, HIMA MD 70.1 - 1983.
- The metal luer lock fitting is made from nickel-plated brass and fits all female luer lock fittings.
- The syringe is clearly marked with graduations of 0.2 ml and 1.0 ml. The graduations are permanently fused for lifetime legibility.

Glass Properties:

Expansion coefficient:	52 +/- 10 ⁻⁷ / Centigrade	Softening point:	760 @ degrees centigrade
Density:	2.33g +/- 0.03g CM ³	Melting temperature:	1250 @ degrees centigrade
Modulus of elasticity:	64 +/- 10 ³ mm ⁻²	Strain point:	500 @ degrees centigrade
Water resistance:	First Class	Annealing point:	545 @ degrees centigrade
Acid resistance:	First Class	Hardness:	7
Alkali resistance:	First Class	Color:	Clear